





Single Table Series

Fixed Bridge, Moving Table

Model ID	S		
Table Size	X	Y	Z
	96"	48"	11"
W5	96", 120", 144"	60"	11"
W6	120", 144"	72"	11"
	X	Y	Z
Positioning	Ballscrew	Ballscrew	Ballscrew
Rapid Travel	3,000 IPM*	3,000 IPM*	1,000 IPM
	Standard	Optional	
Control	B&R	Osai, Fanuc	
Spindle HP/kW	18 HP / 13.5 kW	24 HP / 18 kW	
RPM	24,000	NA	
Motor Cooling	Fan	Liquid	
Tool Changer	12 Rotary ATC	See Below	
Base Design	Fabricated Steel Weldment		
Column Design	Fabricated Steel Weldment		
Bridge Design	Cast Iron		
Optional Equipment			
C-Axis	Drill Blocks (4, 9, 14, 18)	Roller Holddown	
Upgraded Table Options	Agg Station	Floating Duct	
NEMI	Laser Comp		
Auto Tool Measurement	Thru Tool Coolant		
Pop-Up Pins	2nd - 12 Rotary ATC		
Dust Stanchion Kit	Rotary Axis		
Pre-Wire Retrofit Kit	Auto-Lubrication		
Custom Vac Zones	Automation	* Rapids May Vary	

* Specifications/Options may vary on certain machine sizes, controls, and spindles. Specifications are approximate and subject to change. Ver 14-01-21

Table Layouts

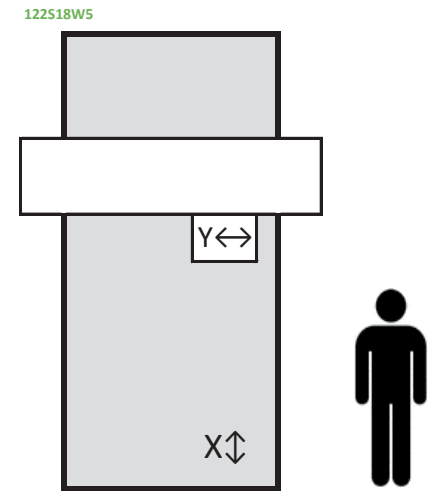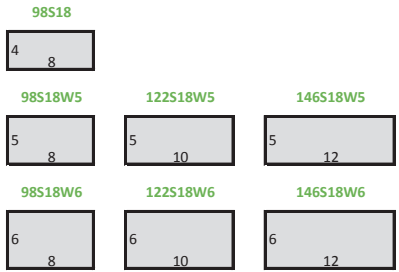

ATA Engineering Processes Ltd

Unit B, ATA House, Boundary Way, Hemel Hempstead, Herts, HP2 7SS

Telephone: +44 (0)1442 264411 Fax: +44 (0)1442 231383 Email: sales@ataeng.com

